

CEILING SPEAKER



Watt
20W, 30W, 40W



Line Input
100V




Sensitivity
87±3db

Technical Specifications

Model No.	ATDSC CS 500	ATDSC CS 600	ATDSC CS 800
Speaker	2 way ceiling 5" speaker	2 way ceiling 6" speaker	2 way ceiling 8" speaker
Tweeter in the centre	Adjustable tweeter for desired sound in a particular direction	Adjustable tweeter for desired sound in a particular direction	Adjustable tweeter for desired sound in a particular direction
Watt	20W	30W	40W
Power taps	20W/15W/7.5W	30W/15W/7.5W	40W/20W/10W
Frequency Response	100-20KHz	100-20KHz	100-20KHz
Sensitivity (1M/1W)	87 $\pm$ 3db	87 $\pm$ 3db	87 $\pm$ 3db
SPL	96dB at 100V/ 10W	96dB at 100V/ 10W	96dB at 100V/ 10W
Rated Power	20W	30W	40W
Line Input	100V	100V	100V
Woofer Speaker Voice Coil Size	25.9 x 0.17 x 2 Layer	25.9 x 0.17 x 2 Layer	25.9 x 0.17 x 2 Layer
DC Impedance	7.2 Ω	7.2 Ω	7.2 Ω
Former	ASV	ASV	ASV

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK

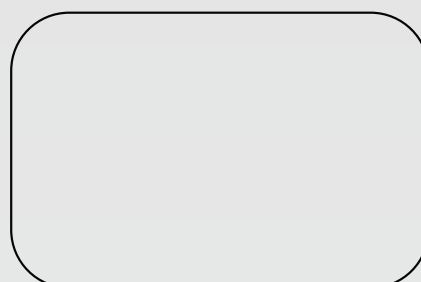

www.atdscindia.com